



## FEATURES AND BENEFITS

Compact size: 6.5" x 2.8" x 1.5"	Meets EN55015/CISPR15, CISPR22, CISPR32, FCC Part 15.109 Class B Conducted & Radiated Emissions, with 6db margin
Meets DoE Efficiency Level VI and EU CoC Version 5, Tier 2 Requirements No load input power, Average Efficiency	Approved to EN/IEC/UL/CSA C22.2 No. 60950-1, 2nd Edition, Am. 2
Up to 150W of AC-DC Power	3 Year Warranty
>10 years E-cap life	RoHS/REACH Compliant
Universal Input 90-264Vac Input Range	Blue LED Indicator
IP22 Rated Enclosure	



## MODEL SELECTION

Model Number <sup>4</sup>	Volts	Output Current	Output Power	Ripple & Noise <sup>1</sup>	Line Regulation	Load Regulation	Output Cable & Connector	Input Configuration
TE150A1251F01	12.0V	12.5A	150W	120mV pk-pk	±1%	±5%	6 pin Molex Type2  2.5 x 5.5 x 9.5mm Str.Barrel Type, center (+)	Class I Desktop, IEC60320 C14 Receptacle
TE150A1551F01	15.0V	10.0A	150W	150mV pk-pk	±1%	±5%		
TE150A1851F01	18.0V	8.33A	150W	180mV pk-pk	±1%	±5%		
TE150A2451F01	24.0V	6.25A	150W	240mV pk-pk	±1%	±5%		
TE150A4803F01	48.0V	3.20A	150W	480mV pk-pk	±1%	±5%		
TE150A1251N01	12.0V	12.5A	150W	120mV pk-pk	±1%	±1%	6 pin Molex Type2  2.5 x 5.5 x 9.5mm Str.Barrel Type, center (+)	Class I Desktop, IEC60320 C8 Receptacle
TE150A1551N01	15.0V	10.0A	150W	150mV pk-pk	±1%	±1%		
TE150A1851N01	18.0V	8.33A	150W	240mV pk-pk	±1%	±1%		
TE150A2451N01	24.0V	6.25A	150W	480mV pk-pk	±1%	±1%		
TE150A4803N01	48.0V	3.20A	150W	600mV pk-pk	±1%	±1%		
TE150A1251Q01	12.0V	12.5A	150W	120mV pk-pk	±1%	±1%	6 pin Molex Type2  2.5 x 5.5 x 9.5mm Str.Barrel Type, center (+)	Class II Desktop, IEC60320 C18 Receptacle
TE150A1551Q01	15.0V	10.0A	150W	150mV pk-pk	±1%	±1%		
TE150A1851Q01	18.0V	8.33A	150W	180mV pk-pk	±1%	±1%		
TE150A2451Q01	24.0V	6.25A	150W	240mV pk-pk	±1%	±1%		
TE150A4803Q01	48.0V	3.20A	150W	480mV pk-pk	±1%	±1%		

- Notes :**
1. Measured at the output connector, with noise probe directly across output and load, terminated with 0.1µF ceramic and 47µF low ESR capacitors.
  2. Molex p/n 39-01-2060 or equivalent. See outline drawing for pinout information.
  3. For Input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (TE120B1251F01).
  4. All specifications are typical at nominal input, full load, at 25°C ambient unless noted.



## INPUT

AC Input	100-240Vac, ±10%, 47-63Hz, 1Ø
Input Current	115Vac: 1.6A, 230Vac: 0.8A
Inrush Current	230Vac, cold start: will not exceed 70A pk
Input Fuses	F1, F2: 3.15A/250Vac fuses (line & neutral lines) provided on all models
Leakage Current	Input-GND: <500µA@264Vac, 60Hz, NC Output-GND: <4mA@264Vac, 60Hz, NC Enclosure Leakage: TBDuA
Efficiency	Meets US DoE Efficiency Level VI, EU CoC Version 5, Tier 2 average efficiency levels
No Load Input Power	<0.150W surpassing DoE Efficiency Level VI and EU CoC Version 5, Tier 2 Requirements

Notes : All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

## OUTPUT

Output Voltage	See models chart on pg 1.
Output Power	150W continuous – See models chart for specific voltage model ratings.
Turn On Time	Less than 1 sec @115Vac, full load
Ripple and Noise	See models chart on pg 1.
Hold-Up Time	20mS min., at full Load, 100Vac input
Output Power	500µs response time for return to within 0.5% of final value for any 50% load step over the range of 5% to 100% of rated load, $\Delta I/\Delta t < 0.2A/\mu s$ . Max voltage deviation is +/-3.5% of final value.

Notes : All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

## SAFETY

Safety Standards	EN/CSA/UL/IEC 60950-1, 2nd Edition, Am 2 CSA C22.2 No.
Safety Drop Test	1.4m from table top to wooden platform, 5 faces (face with the output cord not needed.).

Notes : All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

## EMI/EMC COMPLIANCE

Conducted Emissions	EN55015/CISPR15:2013 Class B, CISPR22 2006 Class B, CISPR32 Class B, FCC Part 15.107, Class B: 6db margin typ, at 115 and 230Vac
Radiated Emissions	EN55022/CISPR22 Class B, CISPR32 Class B, FCC Part 15.109, Class B: 3db margin typ, at 115 and 230Vac
Common Mode Noise	High Frequency (100kHz-20MHz): <40mA pk-pk - See test set up below
Electro-Static Discharge (ESD) Immunity on Power ports	EN55024/IEC61000-4-2, Level 4: +/- 8kV contact, +/- 15kV air, Criteria A
Radiated RF EM Fields Susceptibility	EN55022/EN61000-4-3, 10V/m, 80MHz-2.7GHz, 80% AM at 1kHz
Electrical Fast Transients (EFT) /Bursts	EN55024/IEC61000-4-4, Level 4, +/- 4.4kV, 100Khz rep rate, 40A, Criteria A
Surges, Line to Line (Diff Mode) and Line to GND (CMN Mode)	EN55024/IEC61000-4-5, Level 4, +/-2.2kV DM, +/-4.4kV CM, Criteria A
Conducted Disturbances induced by RF Fields	EN55022/IEC61000-4-6, 10Vrms – Level 4, in ISM and amateur radio bands between 0.15Mhz and 80Mhz, 80% AM at 1KHz
Rated Power frequency magnetic fields	EN55024/IEC1000-4-8, Level 4: 30 A/m, 50/60 Hz
Voltage Interruptions, Dips, Sags & Surges	EN55024/IECEN61000-4-11: --100% dip for 20mS, Criteria A --100% dip for 5000mS (250/300 cycles), Criteria B --60% dip for 100mS, Criteria B --30% dip for 500mS, Criteria A
Harmonic Current Emissions	EN55011/EN61000-3-2, Class A & C (at 100% load)
Flicker Test	EN61000-3-3

Notes : Above parameters will be tested to 20% margin at 10%, 50%, 100% load.



## PROTECTION

Overvoltage Protection	115 to 130% of output voltage (max. 60V on 48V model), latching, recycle AC power to recover
Short Circuit Protection	Hiccup Mode, auto recovery.
Overtemperature Protection	Will shutdown upon an over-temperature condition, auto-recovery.
Overload Protection	130 to 180% of rating, Hiccup Mode
Shock	Operating: Half-sine, 20gpk, 10mS, 3 axes, 6 shocks total Non-Operating: Half-sine waveform, impact acceleration of 50G, Pulse duration of 6 mS, Number of shocks: 3 for each of the three axis

## RELIABILITY

MTBF	>250,000 hours, full load, 115 & 230Vac input, 25°C amb., Telcordia SR-332 Issue 3.
E-Cap Life	>10 year life based on calculations at 115Vac/60Hz & 230Vac/50Hz, ambient 25°C at 24 hrs per day, 365 days/year, 6 power up cycles per day. (80% load on 12V models)

## ISOLATION SPECIFICATIONS




Isolation <sup>1</sup>	Input-Output 3000Vac Input-Ground 1500Vac Output-Ground 500Vac
Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms / 500VDC

**Notes :** All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

## ENVIRONMENT

Operating Temperature	-20°C to +70°C. Derate above 50°C. Ripple & Noise = 2% from -20°C to 0°C
Temperature Derating	Derate output power above 40°C to TBD at 50°C
Vibration	Operating: 0.003g/Hz, 1.5grms overall, 3 axes, 10 min/axis, 1-500Hz. Non-Oper.: random waveform, 3 minutes per axis, 3 axes and Sine waveform, Vib. frequency/acceleration: 10-500Hz/1g, sweep rate of 1 octave / minutes, Vibration time of 10 sweeps / axes, 3 axes
Case Temperature	Case Temperatures are within regulatory guidelines. Care should be taken to avoid prolonged contact with skin or other heat sensitive surfaces.
Relative Humidity	5% to 95%, non-condensing
Storage Temperature and Humidity	-40°C to +85°C
Weight	700g
Dimensions	165mmX37mmX72mm Case

## MECHANICAL DRAWING

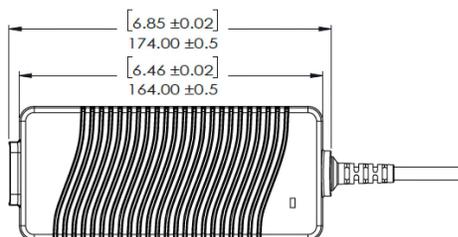

FOOT PAD(4X)



### CONNECTOR INFORMATION

Standard 48V models include a 2.5 x 5.5 x 9.5mm straight barrel type connector (Ault #3), center positive. (#51 for the 12V thru 24V models). Other standard options are listed below. The "03" or "51" in the standard model number is replaced by the applicable digits below :

Connector No.	Description	Connector No.	Description
02	2.0 x 5.5 x 9.5 mm straight barrel plug - Center positive	44	2.0 x 5.5 x 9.5 mm straight barrel plug, locking - Center positive
03	2.5 x 5.5 x 9.5 mm straight barrel plug - Center positive (Standard models)	45	2.5 x 5.5 x 9.5 mm straight barrel plug, locking - Center positive
12	5 pin DIN-180 male connector (Pins 3,5 = (+), pins 1,2,4=(-))	48	3 pin snap n lock, kycon kpp-3P or equivalent (pin 1=(+), pin
22	6 pin DIN male connector (Pins 1,2 = (+), pins 4,5=(-))	49	4 pin snap n lock, kycon kpp-4P or equivalent (pin 1,3=(+), pin
23	8 pin DIN male connector (Pins 3,7 = (+), pins 1,4,6,8=(-), shell=FG)	70	2.0x 5.5 x11 mm right angle barrel plug (High retention) - Center positive
32	9 pin "D" type, female (Pins 8 = (+), pins 5=(-), all others=NC)	51	6 pin Minifit-Molex 39-01-2060 or equivalent (pin 1,4=(+), pin
33	2.5 x 5.5 x 12.5 mm straight barrel plug- Center positive	71	2.5x 5.5 x11 mm right angle barrel plug (High retention) - Center positive
40	2.0 x 5.5 x 9.5 mm right angle barrel plug (High retention) - Center positive	65	Stripped and Tinned Leads
41	2.5 x 5.5 x 9.5 mm right angle barrel plug (High retention) - Center positive	72	2.0x 5.5 x9.5 mm straight barrel plug (High retention, no spark ) - Center positive
42	2.0 x 5.5 x 11 mm straight barrel plug (High retention) - Center positive	73	2.5x 5.5 x9.5 mm straight barrel plug (High retention, no spark ) - Center positive
43	2.5 x 5.5 x 11 mm straight barrel plug (High retention) - Center positive	74	EIAJ#5 style connector - Central Positive

Notes : XLR type connectors also are available, consult factory for details.





### EFFICIENCY LEVEL VI INFORMATION:

Single-Voltage Extrenal AC-DC Power Supply, Basic-Voltage		
Nameplate Output Power (P <sub>out</sub> )	Minimum Average Efficiency in Active Mode (expressed as a decimal)	Maximum Power in No-Load Mode [W]
P <sub>out</sub> ≤ 1 W	≥ 0.5 x P <sub>out</sub> + 0.16	≤ 0.100
1 W < P <sub>out</sub> ≤ 49 W	≥ 0.071 x ln(P <sub>out</sub> ) --- 0.0014 x P <sub>out</sub> + 0.67	≤ 0.100
49 W < P <sub>out</sub> ≤ 250 W	≥ 0.880	≤ 0.210
P <sub>out</sub> > 250 W	≥ 0.875	≤ 0.500
Single-Voltage Extrenal AC-DC Power Supply, Low-Voltage		
Nameplate Output Power (P <sub>out</sub> )	Minimum Average Efficiency in Active Mode (expressed as a decimal)	Maximum Power in No-Load Mode [W]
P <sub>out</sub> ≤ 1 W	≥ 0.517 x P <sub>out</sub> + 0.087	≤ 0.100
1 W < P <sub>out</sub> ≤ 49 W	≥ 0.0834 x ln(P <sub>out</sub> ) --- 0.0014 x P <sub>out</sub> + 0.609	≤ 0.100
49 W < P <sub>out</sub> ≤ 250 W	≥ 0.870	≤ 0.210
P <sub>out</sub> > 250 W	≥ 0.875	≤ 0.500

TE150 Series

In addition, TE150 Series will meet the EU Code of Conduct, Version 5, Tier 2 requirements. (<0.150W no load input power)