

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 26.5 GHz
- 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C  
DERATED LINEARLY TO 0 WATTS @ +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR (MAX.):  
DC to 18.0 GHz: 1.05 + 0.008f(GHz)  
18.0 to 26.5 GHz: 1.30:1

2.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

3.0 MARKING:

MARK UNIT AS SHOWN.  
((REF.: INK-09035-27-02))

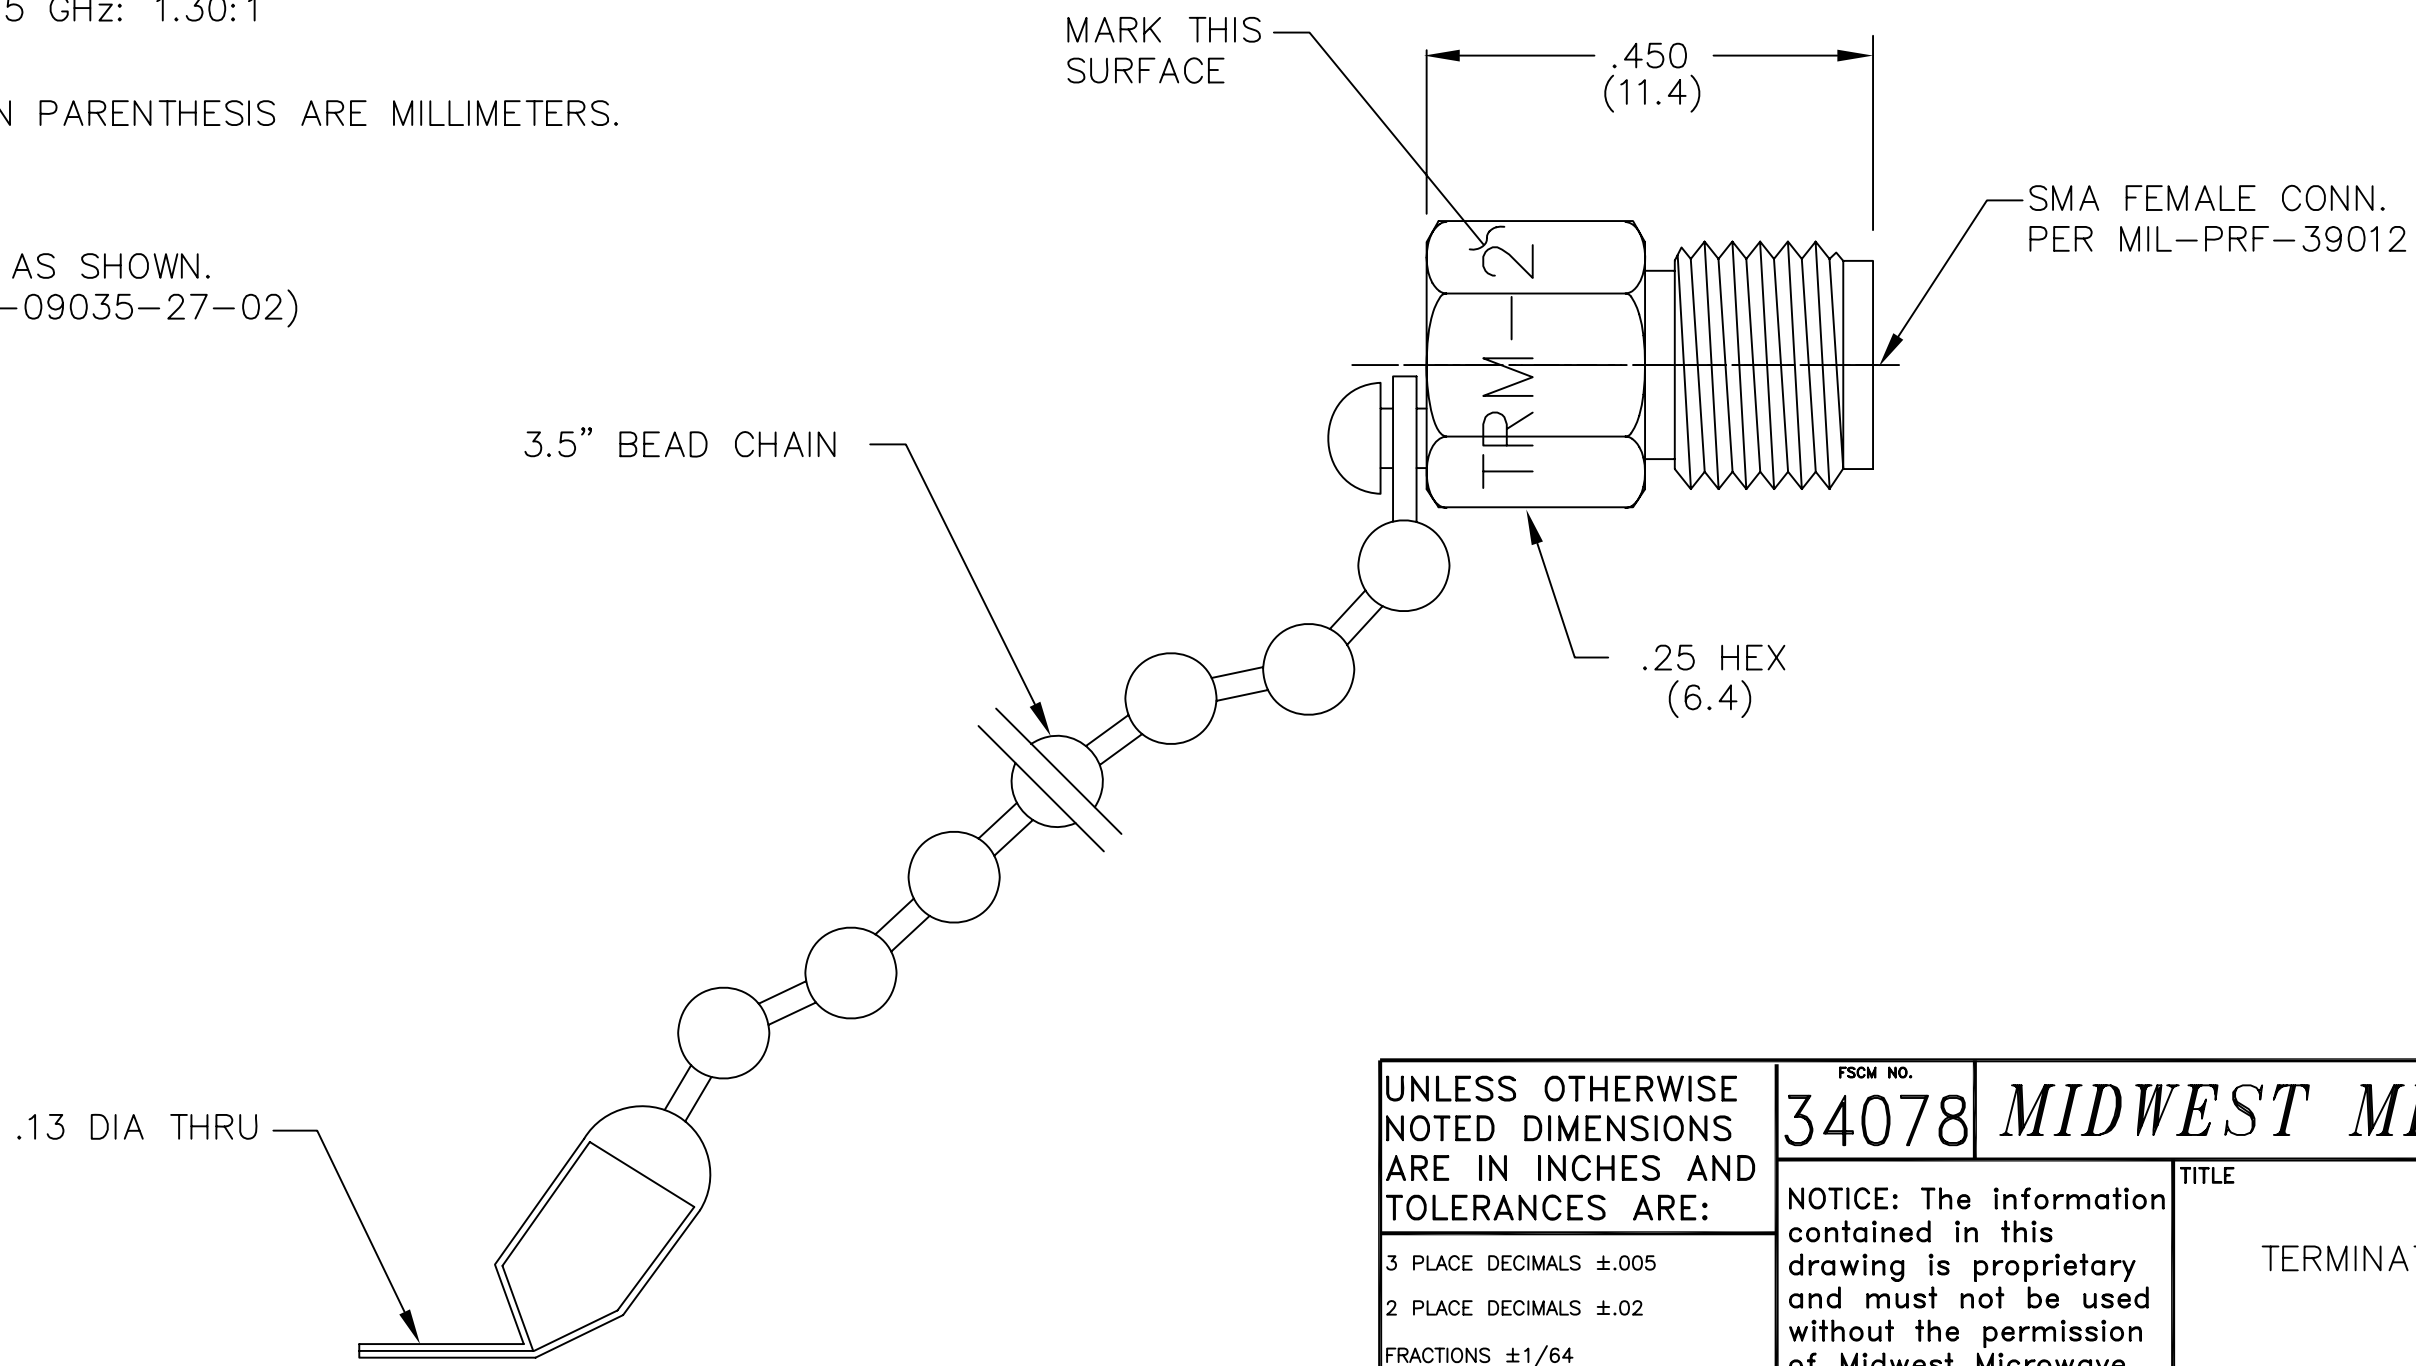

REV.	DESCRIPTION	DATE
-	RELEASED	3/10/94
A	ECN 14170	12/19/94
B	ECN 18767	10/9/02

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO.	34078 <b>MIDWEST MICROWAVE</b>	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE
			TERMINATION
			DRAWING NUMBER
		TRM-2443-FC-SMA-02	
		SCALE: 5=1	SHEET 1 of 1